



NORTH/SOUTH AMERICA
DELTA PRODUCTS CORPORATION
Sales Office/
P.O. BOX 12173
5101 DAVIS DRIVE
RESEARCH TRIANGLE PARK,
NC 27709, U.S.A.
TEL: 1-919-767-3813
FAX: 1-919-767-3969

EUROPE
DELTRONICS (NETHERLANDS) B.V.
DE WITBOGT 15
NL-5852 AG EINDHOVEN
THE NETHERLANDS
TEL: 31-40 259-2850
FAX: 31-40 259-2851

DELTA ELECTRONICS (JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 106-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

VFD-L series have been approved by CE and UL

Voltage Range:

- 1 Phase 110V Series : 200W~400W
1 Phase 230V Series : 200W~0.75KW (200W~1HP)
3 Phase 230V Series : 200W~1.5KW (200W~2HP)

www.delta.com.tw/industrialautomation





Delta VFD-L Series

Sub-Fractional General Purpose Drive




Dimensions




Function Display

115V/200 400W,230V/200W 2HP



Wiring



NOTE: Do not plug in a Modem or telephone line to the RS-485 communication port, or permanent damage may result. Terminals 1 & 2 are the power source for the optional copy keypad and should not be used while using RS-485 communication.

- * If the AC Drive model is VF0302L11A/B, VF0304L11A/B, VF0202L2/B, VF0204L2/B or VF0207L2/B, please use power terminals R/L1 and S/L2.
- * If the AC Drive model is VF0201S1A, VF0204S1A or VF0207L2A, 3 phase power must be used on R/L1, S/L2, T/L3.
- * If the AC Drive model is VF0101S23A, single phase power is not recommended.

VFD-L

Standard Specifications

Voltage Class			115V		230V			
Model Number VFD-□□□□□□A/B			002	004	002	004	007	015
Applicable Motor Output (kW)			0.2	0.4	0.2	0.4	0.7	1.5
Output Rating	Rated Output Capacity (KVA)		0.6	1.0	0.6	1.0	1.6	2.7
	Rated Output Current (A)		1.6	2.5	1.6	2.5	4.2	7.0
	Max. Output Voltage (V)		3phase double the input voltage					
	Rated Frequency (Hz)		1.0~400Hz					
Power	Rated Input Current (A)		6	9	4.9/1.9	6.5/2.7	9.7/5.1	*/9
	Input Voltage Tolerance		Single phase 100~120V 50/60Hz		Single / 3-phase 200~240V 50/60Hz			3-phase 200~240V 50/60Hz
Control Characteristics	Frequency Tolerance		±5%					
	Control System		SVPWM (Space Vector Pulse Width Modulation, carrier frequency 3kHz~10kHz)					
	Output Frequency Resolution		0.1Hz					
	Torque Characteristics		Including auto-torque and auto-slip compensation, the starting torque is 150% at 5Hz					
	Overload Endurance		150% of rated current for 1 minute					
Control Characteristics	Accel/Decel Time		0.1~600Sec. (can be set individually)					
	V/F Pattern		Adjustable V/F curve					
	Stall Prevention Level		20~200% of rated output current					
Operating Characteristics	Frequency Setting	Keypad	Setting by ▲▼ keys or potentiometer					
	Operation Setting	External Signal	Potentiometer-5K/Ω, 5W, DC 0 ~ +10V (input impedance 100K), 4~20mA (output impedance 250 Ω), 3 multi-function inputs (3 preset speeds, JOG, UP/DOWN command), communication setting					
	Signal	External Signal	RUN/STOP keys					
	Multi-function Input Signal		M0,M1,M2,M3 can be combined to offer various modes of operation, RS-485 communication port					
	Multi-function Output Signal		Multi-step speed selection 0 to 3, Jog, accel/decel inhibit, first/second accel/decel selector, counter, PLC operation, external base block (NC,NO) selection					
	Multi-function Output Signal		AC Drive Operating, Frequency Attained, Non-zero speed, Base Block, Fault Indication, Local/Remote control indication, PLC Operation indication.					
Environment	Other Function		AVR, S-curve, Over-Voltage Stall Prevention, DC Braking, Fault Records, Adjustable Carrier Frequency, Over-Current Stall Prevention, Momentary Power Loss restart, Reverse Inhibit, Frequency Limits, Parameter Lock/Reset					
	Protection		Over Voltage, Over Current, Under Voltage, Overload, Overheating, Self-testing, Ground fault					
	Other		Built-in EMI Filter for Frame B (single phase)					
	Cooling		Forced air-cooling					
	Installation Location		Altitude 1,000 m or below, keep from corrosive gasses, liquid and dust					
Environment	Ambient Temperature		-10˚C to +40˚C (Non-Condensing and not frozen)					
	Storage Temperature		-20˚C to +60˚C					
	Ambient Humidity		Below 90%RH (non-condensing)					
Vibration			9.80665mm/s ² (1G) less than 20Hz, 5.88mm/s ² (0.6Gat) 20 to 50Hz					

*We reserve the right of this catalogue contained information changes without prior notice.

VFD-L

Rated frequency range 1Hz~120Hz

VFD-L

115V / 230V model

VFD-L

Standard Specifications

Features:

- 1.16-bit microprocessor controlled SVPWM output.
- 2.Low noise ; carrier frequency up to 10kHz.
- 3.Controlled reversing.
- 4.2 inputs and 1 output terminal for external controls.
- 5.Adjustable V/F curve.
- 6.Adjustable accel / decel time.
- 7.RS-485 communication (Baud rate 9600).
- 8.Option: Programmable Keypad (VFD-PU02).



Suitable for under 100W/3-phase AC motor drive



Compact with VFD-PU02 for running and monitoring AC motor drive (Optional)



Built-in Modbus Communication

Function Display



- Power LED
- Fault LED
- Output Freq. Potentiometer
- Run/Stop Switch
- Fwd/Rev Switch

Installation Method




Control Terminal Wiring




Motor Terminal Wiring


Wiring



Dimensions

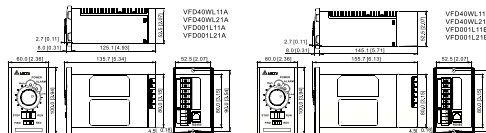

Installation Dimensions



Voltage		115V				230V			
Model Number VFD-□□□ LK1A/B		40W		001		40W		001	
Max. Applicable Motor Output(w)		25/40		60/100		25/40		60/100	
Output Rating	Rated Output Capacity (VA)	106/152		212/303		106/152		212/303	
	Rated Output Current (A)	0.28/0.4		0.56/0.8		0.28/0.4		0.56/0.8	
	Max. Output Voltage (V)	3Phase Double the Input Voltage				Proportional to Input Voltage			
	Rated Frequency (Hz)	1.00 to 120.00 Hz							
Input Rating	Rated Voltage/Frequency	Single-phase 100 to 120 VAC, 50/60 Hz				Single-phase 200 to 240 VAC, 50/60 Hz			
	Voltage/Freq. Tolerance	Voltage:±10%, Frequency:±5%							
	Rated Current (A)	1.1A	1.5A	2.2A	3.0A	0.5A	0.7A	1.0A	1.4A
Control Characteristics	Control Systems	SVPWM (Space Vector Pulse Width Modulation, carrier frequency 10kHz)							
	Torque Setting	High/Low, Switching							
	Overload Endurance	150% of rated current for 1 minute							
	Accel/Decel Time	0 to 30.0 seconds							
Operating Characteristics	Frequency Setting		Potentiometer						
	Operation Setting Signal	Panel	RUN/STOP, FORWARD/REVERSE						
		Ext. Terminal	RUN/STOP, FORWARD/REVERSE, RS-485						
	Output Indication	Panel	Fault Indication (LED Flash)						
		Ext. Terminal	Fault Indication (Open Collector)						
		Protection		Self-testing, OverVoltage, OverCurrent, UnderVoltage, Overload, Overheating, Electronic thermal					
	Other		EMI Filter Built in for Frame B						
	Cooling		Natural air-cooling						
Environment	Installation Location		Altitude 1,000 m or lower, keep from corrosive gasses, liquid and dust						
	Ambient Temperature		-10°C to 40°C (Non-Condensing and not frozen)						
	Storage Temperature		-20°C to 80°C						
	Ambient Humidity		Below 80% RH (non-condensing)						
	Vibration		0.0008mm/s (1G) less than 20Hz, 0.06mm/s (0.6G) at 20 to 60Hz						

*We reserve the right of this catalogue contained information change without prior notice.